




*Safeseal
Technology*

The World's Best Hose Clamp

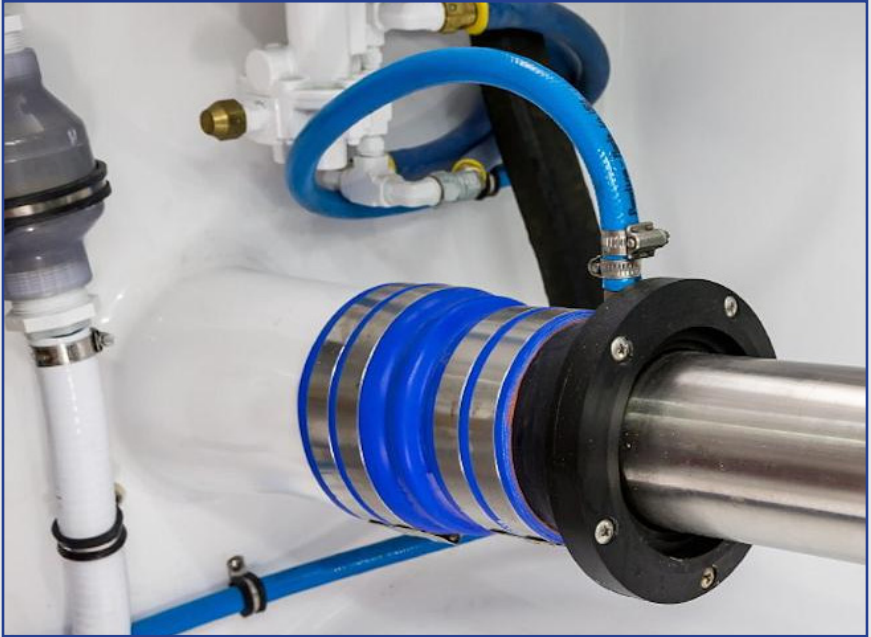

ABA Mini (W4) 304 SS

A nut-and-bolt hose clamp with rolled edges that is ideally suited for small, thin-walled hydraulic and fuel hose.

Strong and Durable Materials


The lug for the screw and nut must be stable enough to resist deformation whenever the nut is tightened. This is why they are made of cold rolled strip stainless steel to Swedish Standard SS 1265.



9mm Band Width


The Nut Stays Put

The nut is retained in the lug, even when the screw has been removed. Another practical detail is the hexagonal screw head, which may be tightened using the ABA flexible socket driver.



Reinforced Band Tongue

The band tongue is designed with a formed section to prevent it from being deformed and causing leakage.




Small Size But Big Demands

This was the concept when designing the ABA Mini Clamp. As a result, the Mini features several well-known ABA characteristics including the rounded edges that ensure the clamp grips the hose firmly but gently.

Bulk # Bags of 50	Boxed # Boxes of 10	Size mm	Clamping Range		Band Width mm
			Inches	mm	
22008	13508	8	19/64 - 21/64	7.5 - 8.5	9
22009	13509	9	21/64 - 3/8	8.5 - 9.5	
22010	13510	10	3/8 - 7/16	9.5 - 11	
22011	13511	11	13/32 - 15/32	10.5 - 12	
22012	13512	12	29/64 - 33/64	11.5 - 13	
22013	13513	13	1/2 - 35/64	12.5 - 14	
22014	13514	14	17/32 - 19/32	13.5 - 15	
22015	13515	15	37/64 - 5/8	14.5 - 16	
22016	13516	16	19/32 - 43/64	15 - 17	
22017	13517	17	5/8 - 45/64	16 - 18	

ABA Original (W5) 316 SS

Clamp with a one-piece housing and embossed worm-drive band with rolled edges. This industry leader out performs and outlasts the competition!




Bulk # Bags of 50	Boxed # Boxes of 10	SAE Size	Clamping Range		Band Width mm	Tightening Torque Inch - Lbs.
			Inches	mm		
13014	13614	3	5/16 - 9/16	8 - 14	9	20 - 35
13017	13617	4	7/16 - 11/16	11 - 17		
13020	13620	6	1/2 - 13/16	13 - 20		
13024	13624	8	5/8 - 1	15 - 24	12	35 - 45
13028	13628	10	3/4 - 1 1/8	19 - 28		
13032	13632	12	7/8 - 1 1/4	22 - 32		
13038	13638	16	1 1/16 - 1 1/2	26 - 38		
13044	13644	20	1 1/4 - 1 3/4	32 - 44		
13050	13650	24	1 1/2 - 2	38 - 50		
66057	13657	28	1 1/4 - 2 1/4	32 - 57		
66064	13664	32	1 1/2 - 2 1/2	38 - 64		
66070	13670	36	1 3/4 - 2 3/4	44 - 70		
66076	13676	40	2 - 3	51 - 76		
66083	13683	44	2 1/4 - 3 1/4	57 - 83	45 - 60	
66089	13689	48	2 1/2 - 3 1/2	64 - 89		
66095	13694	52	2 3/4 - 3 3/4	70 - 95		
66102	13696	56	3 - 4	76 - 102		
66108	13697	60	3 1/4 - 4 1/4	83 - 108		
66114	13698	64	3 1/2 - 4 1/2	89 - 114		
66127	13699	72	3 1/2 - 5	89 - 127		
66140	n/a	80	4 - 5 1/2	102 - 140		
66152	n/a	88	4 1/2 - 6	114 - 152		
66165	n/a	96	5 - 6 1/2	127 - 165		
66178	n/a	104	5 1/2 - 7	140 - 178		
66191	n/a	112	6 - 7 1/2	152 - 191		
66203	n/a	120	6 1/2 - 8	165 - 203		
66216	n/a	128	7 - 8 1/2	178 - 216		
66232	n/a	138	7 5/8 - 9 1/8	194 - 232		
66257	n/a	154	8 5/8 - 10 1/8	219 - 257		
66283	n/a	170	9 5/8 - 11 1/8	244 - 283		
66308	n/a	186	10 5/8 - 12 1/8	270 - 308		


Heavy-Duty GBS (W5) SS

Heavy Duty low profile bolt clamps. Particularly suited for sealing exhaust, pressure or suction lines with plastic or steel inserts and high shore hardness values. Their distinguishing feature is the extremely high band tensile force. Assembly is easily completed by means of either manual, pneumatic or electric standard tools.

TECHNICAL FEATURES

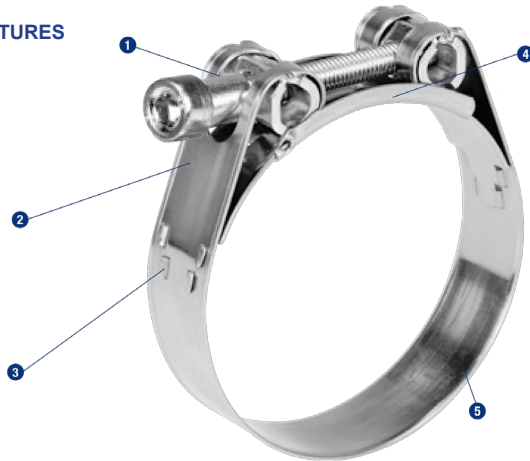

1. New specially designed 6mm hexagonal socket screw with integrated spacer = improved efficiency.
2. Reinforced loops = allow to withstand significantly higher torques.
3. Mechanically locked closure = no welding points, no contact corrosion.
4. Bridge = optimal hose protection.
5. Robust band with rounded edges = protection against injuries and damage to the hose surface.



- Band, Screw & Housing: High Grade Stainless Steel throughout (1.4401/AISI 316)
- Hollow Trunnions
- Diameter Range: 1 1/16" - 12" (17mm - 304mm)
- Available in 3 Band Widths: 18mm - thickness 0.6mm, 25mm - thickness 1.0mm and 30mm - thickness 1.0mm
- Recommended tightening torque: 18mm band = 8 Nm, 25mm band = 20 Nm, 30mm band = 25 Nm
- Fracture torque: 18mm band = 15 Nm, 25mm band = 30 Nm, 30mm band = 45 Nm.

Heavy-Duty GBS (W5) SS

Part #	Box of 10	Clamping Range		Band Width	
		Inches	mm	Inches	mm
67000	67100	11/16 - 3/4	17 - 19	11/16	18
67001	67101	3/4 - 13/16	19 - 21		
67002	67102	13/16 - 7/8	21 - 23		
67003	67103	7/8 - 1	23 - 25		
67004	67104	1 - 1 1/16	25 - 27		
67005	67105	1 1/16 - 1 1/8	27 - 29		
67006	67106	1 1/8 - 1 1/4	29 - 31		
67007	67107	1 1/4 - 1 5/16	31 - 34		
67008	67108	1 5/16 - 1 7/16	34 - 37		
67009	67109	1 7/16 - 1 9/16	37 - 40		
67010	67110	1 9/16 - 1 11/16	40 - 43		
67011	67111	1 11/16 - 1 7/8	43 - 47		
67012	67112	1 7/8 - 2	47 - 51		
67013	67113	2 - 2 3/16	51 - 55		
67014	67114	2 3/16 - 2 5/16	55 - 59		
67015	67115	2 5/16 - 2 1/2	59 - 63		
67016	67116	2 1/2 - 2 11/16	63 - 68		
67017	67117	2 11/16 - 2 7/8	68 - 73	1	25
67018	67118	2 7/8 - 3 1/8	73 - 79		
67019	67119	3 1/8 - 3 3/8	79 - 85		
67020	67120	3 3/8 - 3 9/16	85 - 91		
67021	67121	3 9/16 - 3 13/16	91 - 97		
67022	67122	3 13/16 - 4 1/8	97 - 104		
67023	67123	4 1/8 - 4 7/16	104 - 112		
67024	67124	4 7/16 - 4 3/4	112 - 121		
67025	67125	4 3/4 - 5 1/8	121 - 130		
67026	67126	5 1/8 - 5 1/2	130 - 140		
67027	67127	5 1/2 - 5 7/8	140 - 150		
67038	67138	5 7/8 - 6 3/8	150 - 162	1 3/16	30
67028	67128	6 3/8 - 6 7/8	162 - 174		
67029	67129	6 7/8 - 7 3/8	174 - 187		
67030	67130	7 3/8 - 7 7/8	187 - 200		
67031	67131	7 7/8 - 8 3/8	200 - 213		
67032	67132	8 3/8 - 8 7/8	213 - 226		
67033	67133	8 7/8 - 9 3/8	226 - 239		
67034	67134	9 3/8 - 9 15/16	239 - 252		
67035	67135	9 15/16 - 10 7/16	252 - 265		
67036	67136	10 7/16 - 11	265 - 278		
67037	67137	11 1/2 - 12	291 - 304		

ABA Rubber Lined (W4) SS



Vibration Dampening Support

To properly guard sensitive items from damage due to vibration use ABA Rubber Lined Clamps. Ideal for pipes, cables, groups of cables, hoses, etc. The clamp is made of 304 stainless steel with a rubber liner that also protects the band edges. Impacts and vibrations are dampened by the rubber which also eliminates wear and tear.

Applications

ABA rubber lined clamps are used in the automotive and marine industries, mechanical and apparatus construction, electrical, hydraulic and pneumatic engineering, process industries, shipbuilding, refrigeration and freezing plants, etc.

Bulk # Bags of 50	Boxed # Boxes of 10	Clamping Range		Band Width
		Inches	mm	mm
32301	13301	3/16	5	12
32302	13302	1/4	6	
32303	13303	5/16	8	
32304	13304	3/8	10	
32305	13305	7/16	11	
32306	13306	1/2	13	
32307	13307	9/16	14	
32308	13308	5/8	16	
32310	13310	3/4	19	
32312	13312	7/8	22	
32314	13314	1	25	
32316	13316	1 1/8	29	
32318	13318	1 1/4	32	
32320	13320	1 3/8	35	
32322	13322	1 1/2	38	
32323	13323	1 3/4	45	

ABA Clamp Assortments / Accessories



Counter Top Display Rack

Contains 240 assorted ABA 316 Original and 304 Mini stainless steel hose clamps.

Dimensions: 23 1/4"W x 12 1/2"H x 7"D

Shipping Weight: 17 Lbs.

#31604 Rack with 316 Stainless Steel and 304 Mini Clamps

#24401 Display Rack Only



Cruiser Pack

Contains 56 assorted ABA 316 stainless steel clamps and 1 **#60002** Flexible nut driver

Dimensions: 14" L x 9" W x 2" D

Shipping Weight: 5 Lbs.

#31606 Plastic Case with 316 Original Stainless Steel Clamps

Clamp #	Quantity	Range mm	SAE Size
13014	12	8 - 14	3
13017	12	11 - 17	4
13020	12	13 - 20	6
13024	12	15 - 24	8
13028	12	19 - 28	10
13032	12	22 - 32	12
13038	12	26 - 38	16
13044	12	32 - 44	20
13050	12	38 - 50	24
66057	12	32 - 57	28
22008	12	7.5 - 8.5	8 mm
22009	12	8.5 - 9.5	9 mm
22010	12	9.5 - 11	10 mm
22011	12	10.5 - 12	11 mm
22012	12	11.5 - 13	12 mm
22013	12	12.5 - 14	13 mm
22014	12	13.5 - 15	14 mm
22015	12	14.5 - 16	15 mm
22016	12	15 - 17	16 mm
22017	12	16 - 18	17 mm

Clamp #	Quantity	SAE Size
13017	10	4
13020	10	6
13028	10	10
13038	10	16
13050	8	24
66064	8	32



Flexible 7mm Socket Drivers

#60002 10" Length

#60003 24" Length



Hose Clamp Suitcase

Contains 250 assorted ABA 316 Original stainless steel hose clamps and 1

#60002 Flexible nut driver

Dimensions: 18 3/8"W x 12 1/4"L x 3"D

Shipping Weight: 17 Lbs.

#31605 Case with 316 Stainless Steel Clamps

#10730 Assortment Case Only

Blue Clamp Tail Sleeves



#31601P 5/16" 25 Pack

#31611P 1/2" 25 Pack

#31602P 5/16" 100 Pack

#31612P 1/2" 100 Pack

Clamp #	Quantity	Range mm	SAE Size
13014	50	8 - 14	3
13017	40	11 - 17	4
13020	40	13 - 20	6
13024	25	15 - 24	8
13028	25	19 - 28	10
13032	20	22 - 32	12
13038	15	26 - 38	16
13044	15	32 - 44	20
13050	10	38 - 50	24
66057	10	32 - 57	28

ABFA



- NO WELDS
- VIBRATIONS PROOF
- ROLLED BAND EDGES
- NON PERFORATED BAND
- 30% STRONGER HOUSING
- 100% AISI 316 SS ACID RESISTANT
- OUTPERFORMS AND OUTLASTS THE COMPETITION!



**FOR MORE INFORMATION
VISIT OUR NEW WEBSITE
www.scandvik.com
Toll Free 800-535-6009**